

Modified Sine Wave Inverters

Leading the marine industry in power conversion for over 30 years, ProMariner's On Board Solutions division has designed a complete line of power inverters ranging from 400 to 3,000 watts specifically for marine use. TruePower Marine Inverters will convert your on-board 12VDC battery power to 110VAC household power to run TV's, laptops, gaming systems, power tools, hairdryers, coffee makers, blender's, large appliances and more.

TruePower Marine Power Inverters

Convert 12 VDC Vehicle / Battery Power to 110VAC Household Power

TrueMarine Performance:

- Internal Conformal Coating for Anti-Corrosion
- Soft Start and Noise Filtered Technology
- Bat Saver Mode - 400 to 1,000 Watt Models
- True Rated Continuous Power
- Hi-Surge Ratings for Demanding Loads
- Meets the Requirements of ABYC A-31 Marine
- Highly Visible Power & Fault LED Indicators
- Constructed to UL458

TrueMarine Protection:



- GFCI AC Outlet Safety Protected
- Input Polarity Protection
- Low Battery Alarm and Shutdown
- Overload Protection
- Output Short Circuit Protection
- Thermal Protection
- Over Voltage (15 VDC) Protection

Rich with features, TruePower offers Bat Saver Mode operation on its 400 to 1,000 watt models so your engine crank battery will stay above 11.5V to start your boat or vehicle. Other high end features include dual LED bar graph displays and a remote port on all models between 600 and 1,000 Watts. All 1,500 watt and above models include a removable deluxe dual bar graph remote that can be surface or flush mounted. The 2,500 and 3,000 watt models may be hardwired with GFCI protection and include 110VAC duplex plugs.

- A TruePower 400 Portable** Cigarette Lighter Plug STD • Opt. Mounting Bracket • DC Battery Clamp Cables
- B TruePower 600, 800 & 1000** Dual LED Bar Graph Displays • Integrated Mounting Flanges • Includes DC Battery Cables
- C TruePower 1500** Removable Deluxe Dual LED • Bar Graph Remote • Integrated Mounting Flanges • Includes DC Battery Cables
- D TruePower 2000, 2500 & 3000** AC Hardwire Output – GFCI Protected • GFCI Duplex Receptacle • Removable Deluxe Dual LED Bar Graph Remote • Integrated Mounting Flanges • DC Battery Cables

Specifications

style	part no.	model	Wattage	Surge Rating	dimensions (L) x (W) x (H)	weight
A	05040	TruePower 400	400 Watts	800 Watts	9.25" x 6.0" x 3.0"	7 lbs
B	05060	TruePower 600	600 Watts	1200 Watts	12.0" x 8.2" x 3.5"	11 lbs
B	05080	TruePower 800	800 Watts	1600 Watts	14.4" x 8.2" x 3.5"	12 lbs
B	05100	TruePower 1000	1000 Watts	2000 Watts	14.4" x 8.2" x 3.5"	13 lbs
C	05150	TruePower 1500	1500 Watts	3000 Watts	17.8" x 10.0" x 3.5"	17 lbs
D	05200	TruePower 2000	2000 Watts	4000 Watts	21.0" x 10.0" x 6.3"	30 lbs
D	05250	TruePower 2500	2500 Watts	5000 Watts	21.0" x 10.0" x 6.3"	30 lbs
D	05300	TruePower 3000	3000 Watts	6000 Watts	21.0" x 10.0" x 6.3"	30 lbs
N/A	05121	On/Off Fault Remote	800-1000 Watts	N/A	2.3" x 1.8" x 0.8"	1 lbs

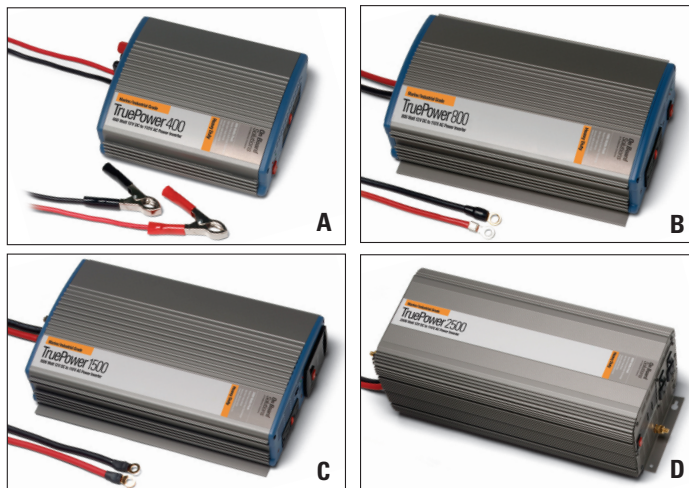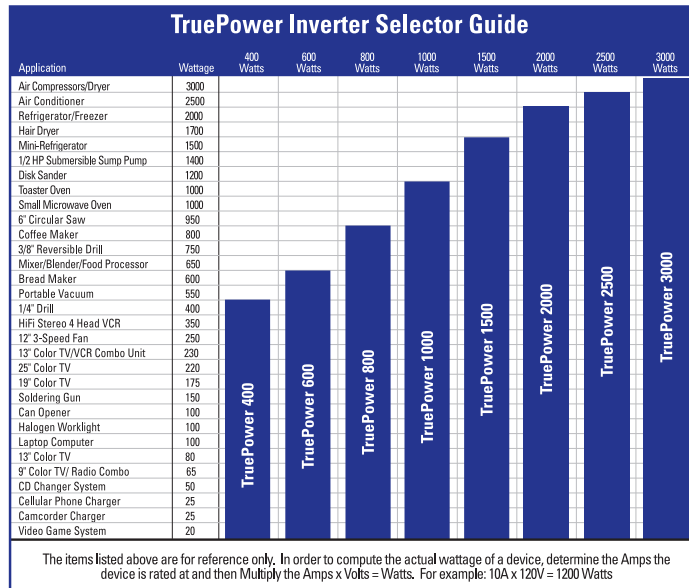

AC Power Center Cupholder Inverter

Perfect for the on-board or on-the-road active user who needs to convert 12 volt battery power to 110VAC. Our patented cup holder design allows for up to 150 watts of AC power at the convenience of your closest cup holder or any flat surface. While on the water or in your car, power your home electronics. Built in safety: polarity, low battery, overload & over temperature protection. Size 2.65" (dia.) x 6 L - 1 year warranty.



P/N 79017 Sh. Wt. 3lbs.

TruePower 400PS 400 Watt Autocrossover Pure Sine Wave Marine Inverter

Ideal for all on-board audio-visual and hi-fi entertainment systems

- ▶ Pure Sine Wave Output
- ▶ Fully Automatic 10 Amp Crossover
- ▶ GFCI Protected
- ▶ Remote Controlled Output
- ▶ Hardwired Connection for AC Output
- ▶ AC Receptacle Outlets (2-Duplex)
- ▶ Built In Protection- Short Circuit, Polarity, Temp and Low Battery

Specifications

model	AC output	AC output power	DC Input	dimensions (L) x (W) x (H)
79405 hardwired	120VAC 60 Hz	400 Watts	12.6VDC	13" x 6.6" x 3.75"
79400 w/ GFCI outlet	120VAC	1000 VA surge for 5 Seconds	up to 40 Amps Continuous	13" x 6.6" x 3.75"

